


Zevac Applications

- 1 **Offshore Pigging & Custom Scopes**
(MINI HP, TWIN, or QUAD; & Custom designed scopes up to ANSI 1500 specs)
- 2 **Well Unloading, and Plug & Abandonment**
(MINI HP, TWIN, or QUAD)
- 3 **Gas Gathering Pigging**
(MINI HP, TWIN, or QUAD)
- 4 **Natural Gas Liquids (NGLs)**
(MINI LP/HP, TWIN, or QUAD)
- 5 **Transmission Lines, Hot Tapping & Integrity Repairs**
(QUAD)
- 6 **In-Line Inspection (ILI) Pigging**
(MINI HP, TWIN, or QUAD)
- 7 **Compressor Stations & Fixed Asset Installations**
(QUAD)
- 8 **Storage Facilities**
(QUAD)
- 9 **Butane & Propane (LPG) Terminals**
(MINI HP, TWIN, or QUAD)
- 10 **Ventless Purging, New PE & Steel Gas Mains**
(MINI LP/HP, TWIN, or QUAD)
- 11 **Main, Meter, & Regulator Repair/Replacement**
(MINI LP/HP, TWIN, or QUAD)



 ZEVAC	MINI	MINI-HP	TWIN-LP (G-4)	TWIN-HP (G4)	QUAD (G4)
Limited standard warranty	1 year part and labour				
Noise suppression silencer	Not required		< 85 dB (included)		
Gas Pressure Range (Bar)	0 - 10.3	0 - 102	0 - 41.4	0 - 102	0 - 102
Over-pressure Cut-off Set Range (Bar)	0.1 - 10.3	10.3 - 102	10.3 - 102	10.3 - 102	10.3 - 102
Under-pressure Cut-off Set Range (Bar)	N/A	0.1 - 3.4	0.1 - 3.4	0.1 - 3.4	0.1 - 3.4
Max flow rate (scm/h)	93.5	680	1020	1870	2040
Typical air compressor	≤90	90 - 180	185 - 375		375 - 750
Recommended min. air compressor spec	102 cmh @ 150 psig	212 cmh @ 150 psig	314 cmh @ 150 psig		637 cmh @ 150 psig
Standard Operating Temperature Range (°C)	-23° to 121°C				
Weight (kg)	83.94	158.80	839.38		1519.96
Dimensions (L x W x H) (cm)	129.5 x 55.8 x 55.8	129.5 x 58.4 x 55.8	148.6 x 104.1 x 116.8		148.6 x 104.1 x 182.9
Typical deployment	Bed / onboard crew truck		Bed of truck; trailer		Flatbed; trailer

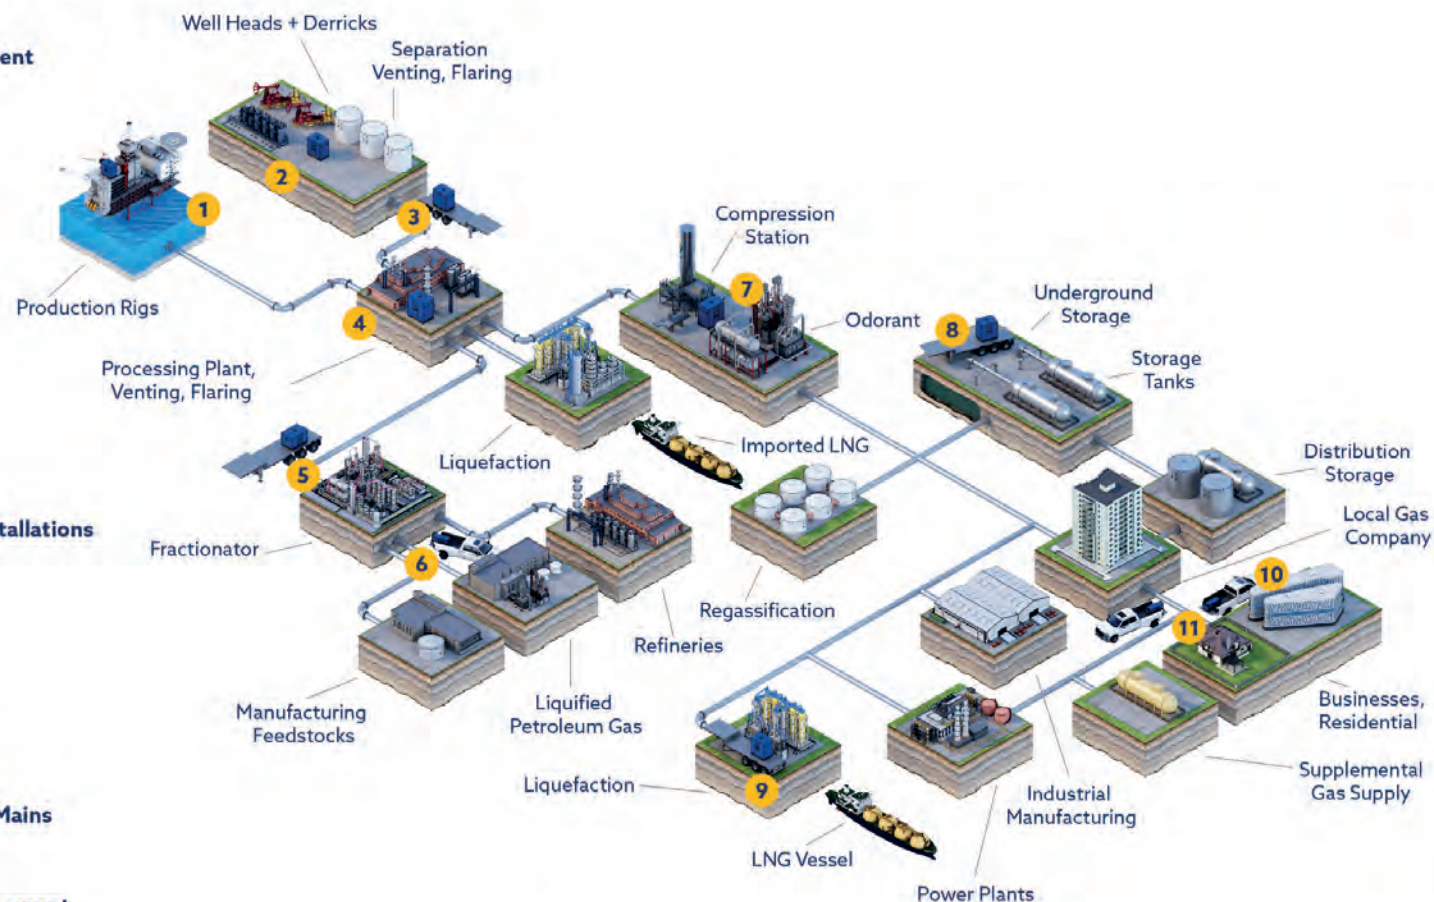

ZEVAC Mini



ZEVAC Twin



ZEVAC Quad

email enquiries@nzerogroup.com

call +44 151 355 5594

www.nzerogroup.com